


-SILVER SOLDER AND  
DRILL .248-.252 DIA  
ORIFICE


-8 MATL: CONNECTOR-PART: PER APPL.  
#B-10F50X-S-1 REQD. AFTER  
AS SHOWN

-12 MATL: BRASS-AMS 4610 -12EQD  
SCALE 2:1

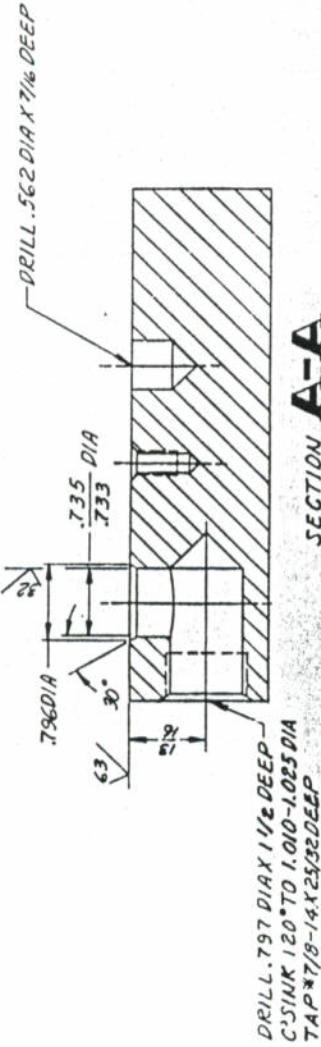


SECTION A-A

(-7) MATL:SAE 1020-1REQD

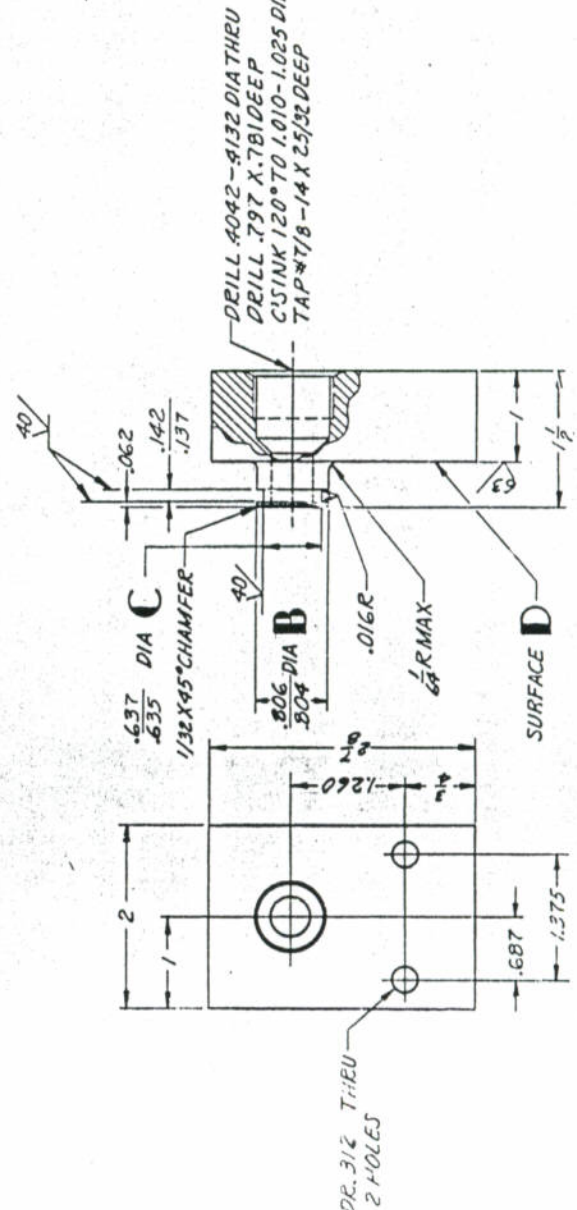

DIA **B** & **C** TO BE CONCENTRIC WITH EACH OTHER WITHIN .002 FIE  
SURFACE **D** TO BE SQUARE TO DIA **B**  
& **C** WITHIN .002 FIE

☺ MAT1:SAF1020-1RF00

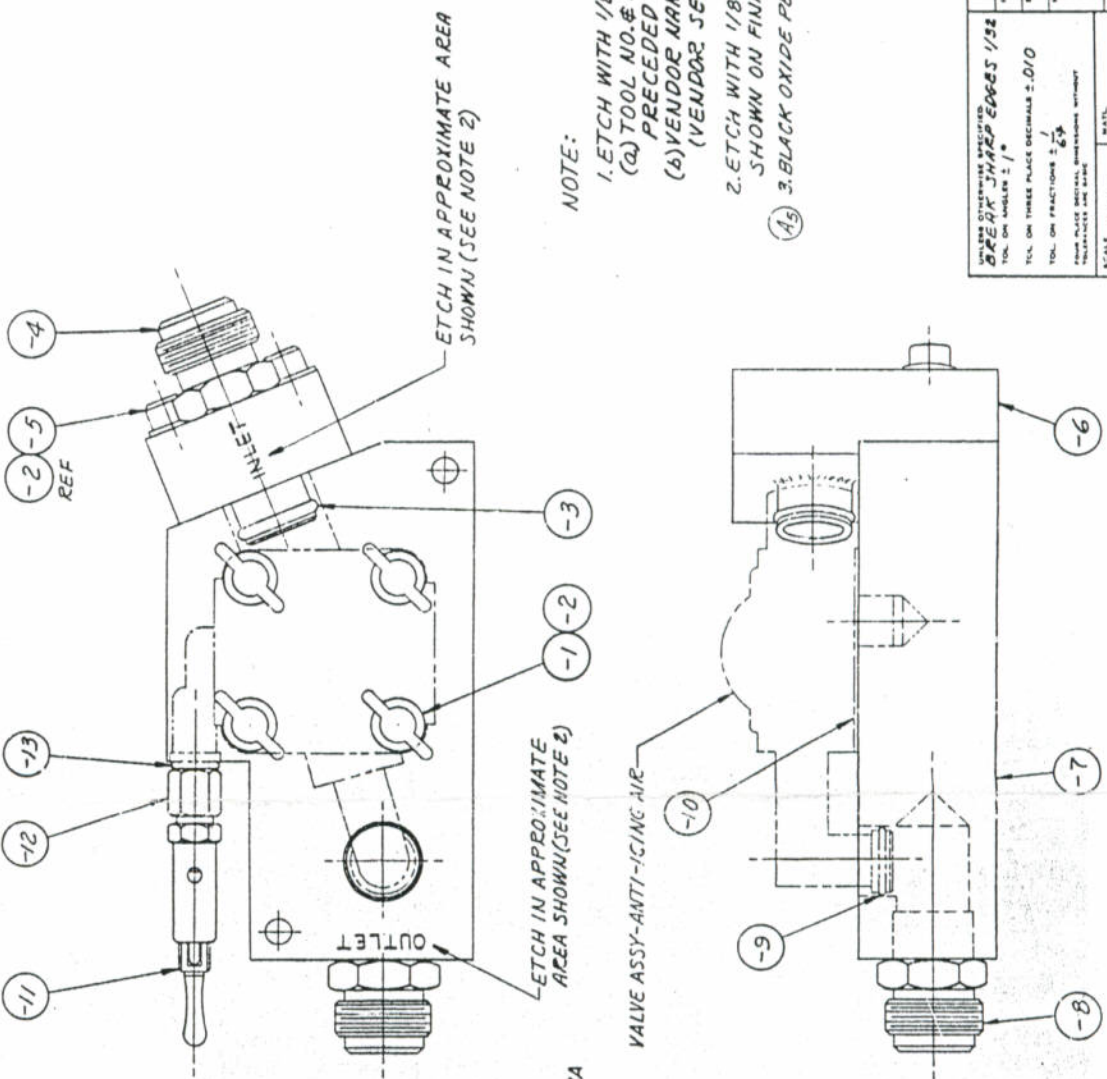

**NOTE:**

(2) TOOL NO. & LAST CHANGE LETTER  
PRECEDED BY "WCD" "ALLISON"  
(4) VENDOR NAME OR TRADEMARK  
(VENDOR SERIAL NO.)

2. ETCH WITH 1/8 TO 3/16 LETTERS AS SHOWN ON FINAL ASSY.

4. 2 BLACK OXIDE PERAMS 20" 5 DETAILS-6A-7.

**FILE COPY**

[illegible]